

**Meter Box  
Electrical  
Overbox - K Protector Frame  
Recessed**

Compliant with Irish Standards

**STOCK CODE: EB0025**

**QUICK OVERVIEW**

The K Protector is an overbox solution, used to repair broken meter boxes. There is no requirement to remove the damaged box, nor to employ an electrician to disconnect the meter. The K Protector Frame overbox is easily fitted in place.


**SPECIFICATIONS AND KEY FEATURES**

- Compliant with ESB Networks specifications.
- Meter box cover to suit recessed meter boxes.
- Repair solution for all Irish recessed meter boxes.
- Manufactured from highly durable and fire retardant Sheet Molding Composite (SMC).
- SMC will not rust or corrode.
- Water tight IP45 design.
- Easily cleaned.
- This cover comes with a tapered back which will fit Wavin, Killarney Plastics, Medium Permali and Tricel meter boxes.
- Supplied with hinges, lock and key.
- Sealant and self-tapping screws included.




**DIMENSIONS**

- Height: 701mm
- Width: 504mm

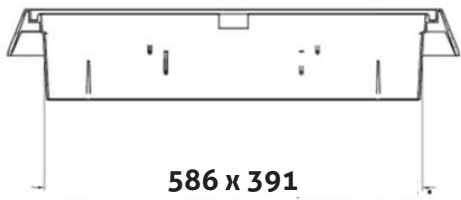

**Tapered back**

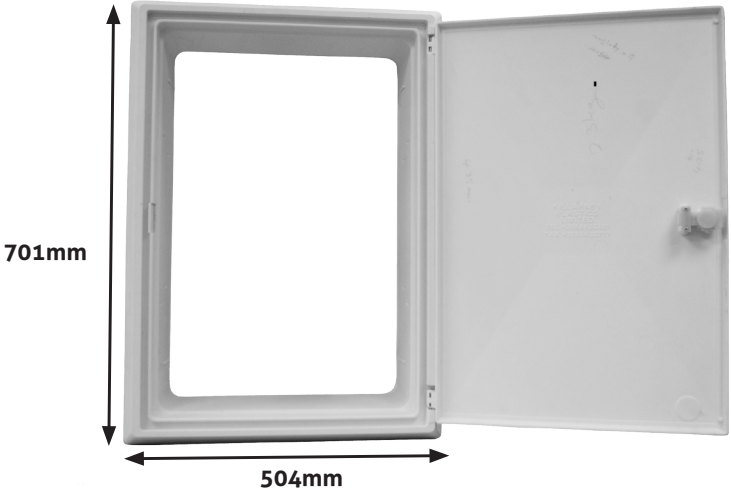

Compliant with Irish Standards

**STOCK CODE: EB0025**

### INSTALLATION PROCEDURE

1. Clean the inside of the frame of existing meter box with a cloth. **See figure 1.**
2. Apply silicone around the frame of the GRP (Glass Reinforced Plastic) Architrave Overbox. Put the nozzle of the cartridge touching the architrave edge. Apply a thick bead of silicon. **See Figure 2.**
3. Apply a thick bead of silicone in the top and bottom corners. **See figure 3.**
4. Slide the Overbox in place into the existing meter box (check that the Overbox is in its correct orientation). **See Figure 4.**
5. Drill 4 holes with a diameter 3.5mm drill bit in the moulded slots. **See Figure 5.**
6. Secure the Overbox in place with self-tapping screws provided. **See Figure 6.**
7. Attach the meter box door to the GRP Architrave Overbox and close. **See Figure 7.**
8. See our video link here <https://youtu.be/kZuSGCGvjDM>



In accordance with Tricel's normal policy of product development, these specifications are subject to change without notice.